



Tipo de Lâmpada (Type of lamp)	Potência (Power)	Tensão (Voltage)
Bulbo LED LED bulb	30W	100~240V
	40W	100~240V
Peso (Kg) Weight		4,2Kg

Marcação/Marking	
Gases	Ex db IIC T6 Gb
Pó(Dust)	Ex tb IIIA T 85° C Db
Grau de Proteção(IP) (Temperature Class)	IP66
Temperatura de Operação (Operating Temperature)	-10°C ≤ Ta ≤ + 50°C;

Descrição do Produto/Product description

Luminária LED, à prova de explosão,
formato tartaruga com tampa/corpo
basculante.

Corpo: Alumínio;

Acabamento: Pintura a pó eletrostática
(Cinza; Outras sob consulta)

Difusor: Vidro borossilicato;

Entrada: Por prensa cabo;

Aterramento Externo: Disponível;

Fator de potência: >0,95;

Normas técnicas: ABNT NBR IEC

60079-0/1, ABNT NBR IEC 60529;

Certificado: Ex TÜV 13.0946X

**LED lamp, explosion-proof, turtle
shape with lid/tilting body.**

Body: Aluminium;

Finish: Electrostatic powder paint
(Grey; Others upon request)

Diffuser: Borosilicate glass;

Input: By cable press;


External Grounding: Available;

Power factor: >0.95;



Technical standards: ABNT NBR IEC

60079-0/1, ABNT NBR IEC 60529;

Certificate: Ex TÜV 13.0946X



Suporte teto (TE)
(Ceiling support)

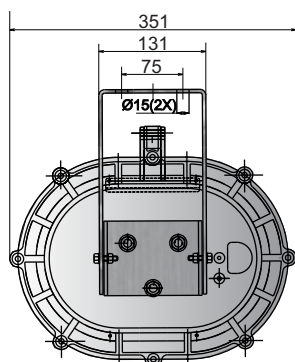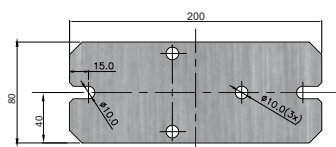

Suporte angular (AN)
(Angle support)

