


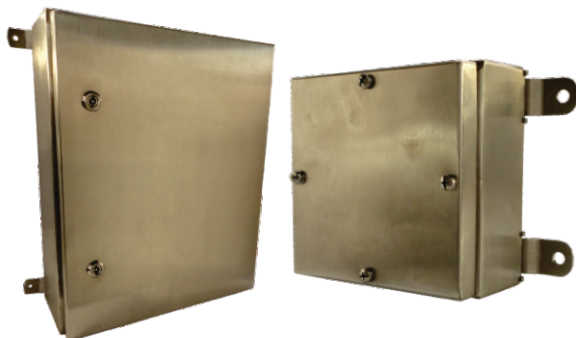

Exe

MARCAÇÃO	
Gases	Ex eb IIC T* Gb
Pó	Ex tb IIIC T* Db
Grau de Proteção	IP66W/IP66
Zonas	1, 2, 21 e 22

Descrição do Produto/ Product description

Caixa de junção metálica de segurança aumentada, tampa aparafusada ou com fecho.

Corpo/Tampa: Aço inox, aço carbono ou alumínio;

Acabamento: Pintado ou escovado;

Vedação: Borracha;

Chassi: Opcional;

Fixação: Por parafuso, não incluso;

Tipo de Fechamento: Por Fecho ou Parafuso;

Normas Técnicas: ABNT NBR IEC 60079-0, ABNT NBR IEC 60079-7, ABNT NBR IEC 60529, IEC 60079-31;

Increased safety metallic Junction box, screwed or lock cover.

Body/Cover: Stainless Steel; Carbon Steel or Aluminium;

Finish: Painted or brushed

Sealing: Rubber;

Chassi: Optional;


Fixing: For screw, not included;

Closing type: By lock or screws;


Technical Standards : ABNT NBR IEC 60079-0, ABNT NBR IEC 60079-7, ABNT NBR IEC 60529, IEC 60079-31;

DESENHO DIMENSIONAL/ DIMENSION DRAWING (mm)


Caixa com face Flangeada/ Box with flanged face

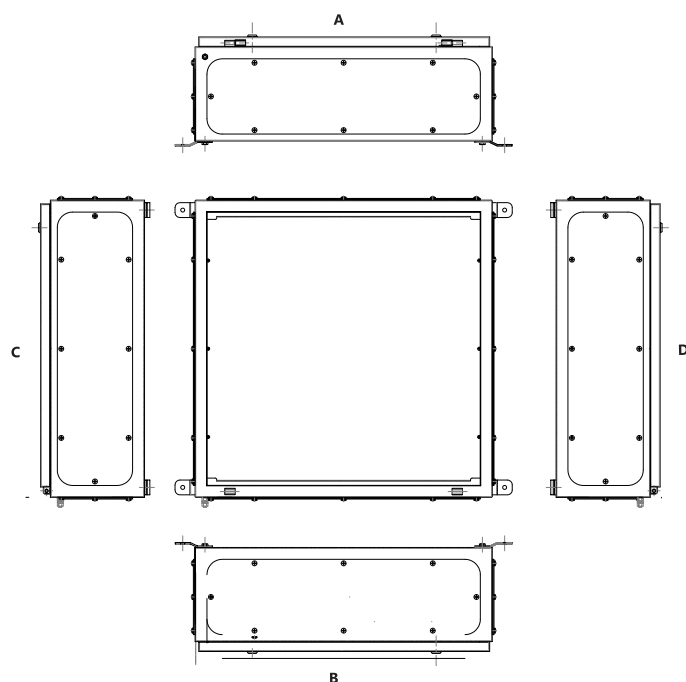


Caixa com Parafuso/ Box with Screw

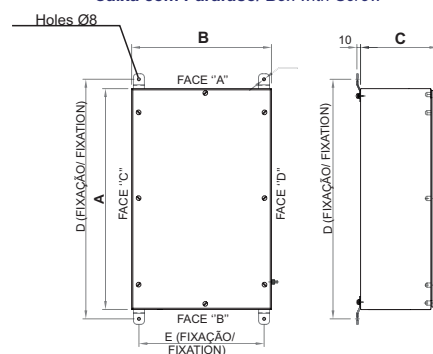

Caixa com Fecho/ Box with Lock

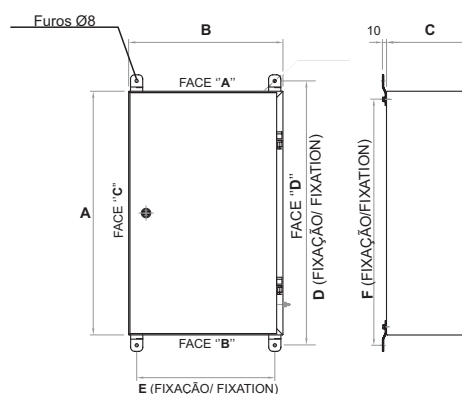

MC135 - (Codigo raiz)

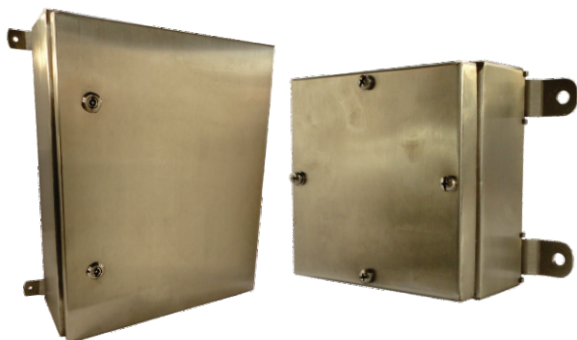

Exe

MARCAÇÃO	
Gases	Ex eb IIC T* Gb
Pó	Ex tb IIIC T* Db
Grau de Proteção	IP66W/IP66
Zonas	1, 2, 21 e 22

Tabela de Dimensões

Modelo	Altura (A) mm	Largura (B) mm	Profund. (C) mm	Fixação			Material da Caixa Material Box	Tampa (Fixação)	
				D	E	F		Fecho	Parafuso
141	150	150	80	200	110	110	Al/AC		X
141G			165				Al/AC		X
145	300	200	155	350	160	260	Al/AC	X	X
145G			165				Al/AC	X	X
151	200	200	100	250	160	160	Al/AC	X	X
151G			165				Al/AC	X	X
155	380	300	155	430	260	340	Al/AC	X	X
155G			165				Al/AC	X	X
161	300	200	120	350	160	260	Al/AC	X	X
161G			165				Al/AC	X	X
165	380	380	210	430	340	340	Al/AC	X	X
165P			165				Al/AC	X	X
170	400	200	200	450	160	360	Al/AC	X	X
171	400	300	160	450	260	360	Al/AC	X	X
171G			165						
172	400	400	200	450	360	360	Al/AC	X	X
175	760	600	210	810	560	720	Al/AC	X	X
175P			165				Al/AC	X	X
181	500	400	160	550	360	460	Al/AC	X	X
181G			165				Al/AC	X	X
182	500	400	200	550	360	460	Al/AC	X	X
183	800	400	200	850	360	760	Al/AC	X	X
184	900	400	200	950	360	860	Al/AC	X	X
185	1000	800	300	1050	760	960	Al/AC	X	X
186	1100	400	200	1150	360	1060	Al/AC	X	X
200	1500	400	200	1550	360	1460	Al/AC	X	X
201	200	300	80	250	260	160	Al/AC	X	X
205	380	300	210	430	260	340	Al/AC	X	X
211	200	400	120	250	360	160	Al/AC	X	X
221G			165				Al/AC	X	X
215	600	380	210	650	340	540	Al/AC	X	X
215P			165				Al/AC	X	X
215G	600	400	200	650	360	560	Al/AC	X	X
221	300	300	120	350	260	260	Al/AC	X	X
221G			165				Al/AC	X	X
225	600	600	210	650	560	560	Al/AC	X	X
226	700	400	200	750	360	660	Al/AC	X	X
231	150	300	80	200	260	110	Al/AC		X
231G			165				Al/AC		X
235	760	760	300	810	720	720	Al/AC	X	X
241	200	200	80	250	160	160	Al/AC	X	X

