

MAC.TGVP.400



APLICAÇÃO / APPLICATION

Utilização em áreas industriais.

Use in industrial areas.



DESCRIÇÃO TÉCNICA / TECHNICAL DESCRIPTION

Luminária metálica para interiores em geral;
Grau de proteção: IP65 / IP65W;

Potência da Lâmpada: 2x 14/18/20W ou 2x 28/36/40W;

Tensão/Frequência: • 125Vcc, 90Vca à 240Vca - 50/60Hz
 • 127V ou 220V - 50/60Hz, com emergência

Lâmpada: Fluorescente tubular;

Corpo: Aço inox;

Refletor: Metalizado;

Difusor: Vidro temperado;

Acabamento: Polido;

Porta Lâmpadas: G13;

Terminais: Para cabos de até 4 mm² (padrão);

Entrada: Por prensa cabo;

Peso: Aprox. 3Kg - (14/18/20W) e 5,5Kg - (28/36/40W).

Emergência: Indicar tensão- 110V ou 220V

Metallic light fixture for interiors in general;
Degree Protection: IP65 / IP65W;

Power lamp: 2x 14/18/20W ou 2x 28/36/40W;

Voltage/Frequency: • 125Vcc, 90Vca to 240Vca - 50/60Hz
 • 127V or 220V - 50/60Hz, emergency

Lamp: Fluorescent tube;

Body: Stainless steel;

Reflector: Metallized;

Diffuser: Tempered glass;

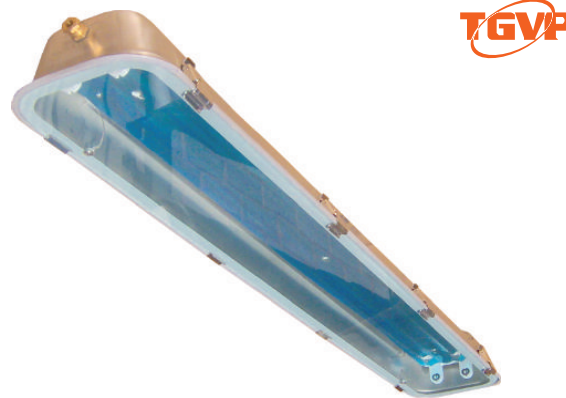
Finish: Polished;

Lamp Holder: G13;

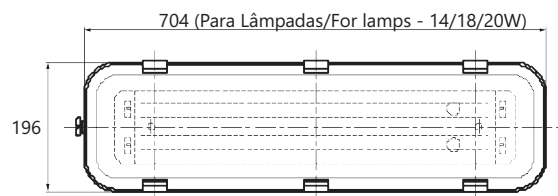

Terminals: For cables up to 4 mm² (default);

Entry: For cable gland;

Weight: Aprox. 3Kg - (14/18/20W) and 5,5Kg - (28/36/40W).

Emergency: Indicate tension - 110V or 220V

TGVP
COM ou SEM SISTEMA DE EMERGÊNCIA
EMERGENCY or NO EMERGENCY SYSTEM


DESENHO DIMENSIONAL (mm)

Drawing dimensions (mm)

 EXEMPLO DO CÓDIGO DO PRODUTO:
 EXAMPLE CODE OF THE PRODUCT

ML400122256AIE
